



# REC

SOLAR'S MOST TRUSTED



# REC ALPHA<sup>®</sup> PURE-RX

## DATASHEET



### PURE STRENGTH

#### 55 MM HAIL RESISTANT

+7000 PA / -4000 PA  
WITH 4 POINT CLAMPING

+10000 PA / -6000 PA  
WITH 6 POINT CLAMPING

## 450 - 470W HETEROJUNCTION TECHNOLOGY

22.6% MAX EFFICIENCY

>92% POWER IN YEAR 25

-0.24%/°C TEMPERATURE  
COEFFICIENT OF P<sub>MAX</sub>



ELIGIBLE

ASSEMBLED WITH FOREIGN AND DOMESTIC COMPONENTS. THESE MODULES ARE COMPATIBLE WITH AVLS INDICATING DOMESTIC CONTENT ADDER ELIGIBILITY


# REC ALPHA® PURE-RX DATASHEET



Measurements in [inches] and mm

## GENERAL DATA

|              |                                                                                               |
|--------------|-----------------------------------------------------------------------------------------------|
| Cell Type    | 88 half-cut bifacial REC heterojunction cells, with gapless technology                        |
| Glass        | 0.13 in solar glass with anti-reflective surface treatment in accordance with EN12150         |
| Backsheet    | Highly resistant polymer (Black)                                                              |
| Frame        | Anodized aluminum (Black)                                                                     |
| Junction Box | 4-part, 4 bypass diodes, IP68 rated, in accordance with IEC 62790:2020                        |
| Connectors   | Stäubli MC4 PV-KBT4/KST4 (12 AWG) in accordance with IEC 62852:2014, IP68 only when connected |
| Cable        | 12 AWG solar cable, 59.1 in (1.50 m) + 59.1 in (1.50 m) in accordance with EN50618:2014       |
| Dimensions   | 68.0 x 47.4 x 1.2 in (22.4 ft²) / 1728 x 1205 x 30 mm (2.08 m²)                               |
| Weight       | 50.0 lb / 22.7 kg                                                                             |
| Origin       | Made in Singapore                                                                             |

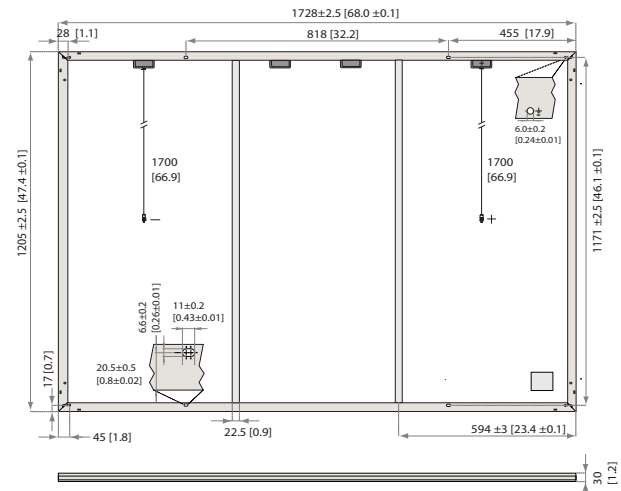

## ELECTRICAL DATA

PRODUCT CODE\*: RECXXXAA PURE-RX-DC

|                                            |       |       |       |
|--------------------------------------------|-------|-------|-------|
| Power Output - $P_{MAX}$ (W <sub>p</sub> ) | 450   | 460   | 470   |
| Watt Class Sorting - (W)                   | 0/+10 | 0/+10 | 0/+10 |
| Nominal Power Voltage - $V_{MPP}$ (V)      | 54.3  | 54.9  | 55.4  |
| Nominal Power Current - $I_{MPP}$ (A)      | 8.29  | 8.38  | 8.49  |
| Open Circuit Voltage - $V_{OC}$ (V)        | 65.6  | 65.7  | 65.7  |
| Short Circuit Current - $I_{SC}$ (A)       | 8.81  | 8.88  | 8.95  |
| Power Density (W/ft²)                      | 21.6  | 22.1  | 22.6  |
| Panel Efficiency (%)                       | 21.6  | 22.1  | 22.6  |

|                                            |      |      |      |
|--------------------------------------------|------|------|------|
| Power Output - $P_{MAX}$ (W <sub>p</sub> ) | 342  | 350  | 358  |
| Nominal Power Voltage - $V_{MPP}$ (V)      | 51.2 | 51.7 | 52.2 |
| Nominal Power Current - $I_{MPP}$ (A)      | 6.70 | 6.77 | 6.86 |
| Open Circuit Voltage - $V_{OC}$ (V)        | 61.8 | 61.9 | 61.9 |
| Short Circuit Current - $I_{SC}$ (A)       | 7.12 | 7.18 | 7.23 |

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of  $P_{MAX}$ ,  $V_{OC}$  &  $I_{SC}$  ±3% within one watt class. Nominal module operating temperature (NMOT: air mass AM1.5, irradiance 800 W/m², temperature 20°C, windspeed 1 m/s). \* Where xxx indicates the nominal power class ( $P_{MAX}$ ) at STC above.

## TEMPERATURE COEFFICIENT\*

|                     |                    |                   |                                                        |
|---------------------|--------------------|-------------------|--------------------------------------------------------|
| $P_{MAX}$ -0.24%/°C | $V_{OC}$ -0.24%/°C | $I_{SC}$ 0.04%/°C | *The temperature coefficients stated are linear values |
|---------------------|--------------------|-------------------|--------------------------------------------------------|

## MODULE RATINGS

|                                                 |                  |
|-------------------------------------------------|------------------|
| Module Operating Temperature [T98] <sup>§</sup> | 176°F (80°C)     |
| Min Environmental Temperature                   | -40°F (-40°C)    |
| Nominal Module Operating Temperature            | 44 ± 2°C         |
| Max Hail Rating <sup>§</sup>                    | 55 mm @ 33.9 m/s |
| System Voltage                                  | 1000 V           |
| Max Series Fuse Rating                          | 25 A             |
| Max Reverse Current                             | 25 A             |

§ 98th percentile operating temperature  
α Kiwa PVEL H55 test result

## MAXIMUM TEST LOAD\*

|                   |                         |
|-------------------|-------------------------|
| Front (4-Point)*  | +7000 Pa (146 lbs/ft²)  |
| Rear (4-Point)*   | -4000 Pa (84 lbs/ft²)   |
| Front (6-Point)** | +10000 Pa (209 lbs/ft²) |
| Rear (6-Point)**  | -6000 Pa (125 lbs/ft²)  |

Design load = Test load / 1.5 (safety factor)

\*IEC61730/UL61730 certified. Refer to installation manual.

\*\*Internal testing. Refer to installation manual.

## CERTIFICATIONS

|                                                         |
|---------------------------------------------------------|
| ISO 14001; ISO 9001; IEC45001; IEC62941                 |
| IEC 61215:2021; IEC 61730:2023; UL 61730                |
| IEC 61730 Fire Class C                                  |
| ISO 11925-2 Ignitability (EN 13501-1 Class E)           |
| EN 13501-5 Roof Fire Performance (B <sub>ROOF</sub> T2) |
| IEC 62716 Ammonia Resistance                            |
| IEC 61701 Salt Mist (SM6)                               |
| IEC 61215:2021 Hailstone (35 mm)                        |
| UL 61730 Fire Type 2                                    |
| IEC TS 63126 Level 1                                    |



## WARRANTY

|                        | Standard | REC ProTrust |           |
|------------------------|----------|--------------|-----------|
| Installed by an REC    | No       | Yes          | Yes       |
| Certified Professional |          |              |           |
| System Size            | All      | <25 kW       | 25-500 kW |
| Product Warranty (yrs) | 20       | 25           | 25        |
| Power Warranty (yrs)   | 25       | 25           | 25        |
| Labor Warranty (yrs)   | 0        | 25           | 10        |
| Power in Year 1        | 98%      | 98%          | 98%       |
| Annual Degradation     | 0.25%    | 0.25%        | 0.25%     |
| Power in Year 25       | 92%      | 92%          | 92%       |


REC ProTrust Warranty applies only for i) REC panels installed by an REC Certified Solar Professional, and ii) panels have been registered by the installer with REC. Subject to System Size and further conditions. See [www.recgroup.com](http://www.recgroup.com) for details.

## DELIVERY INFORMATION


|                                         |                  |
|-----------------------------------------|------------------|
| Panels per Pallet                       | 33               |
| Panels per 40 ft GP/high cube container | 594 (18 Pallets) |
| Panels per 53 ft truck                  | 792 (24 Pallets) |

## LOW LIGHT BEHAVIOR

Typical low irradiance performance of module at STC:

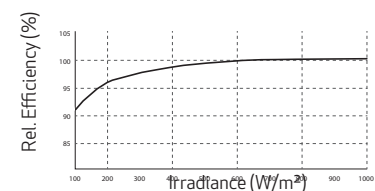

Available from:



Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

REC Solar PTE. LTD.  
20 Tuas South Ave. 14  
Singapore 637312  
[post@recgroup.com](mailto:post@recgroup.com)  
[www.recgroup.com](http://www.recgroup.com)



Specifications subject to change without notice.

UL EN6 2026 V7 REF: PM-DS-12-06/08.04.08.01