

SOLAR'S MOST TRUSTED



# REC ALPHA<sup>®</sup> PURE 2

DATASHEET



- COMPACT PANEL SIZE
- 9 A MODULE CURRENT COMPATIBLE WITH MLPE

400 - 430W  
HETEROJUNCTION  
TECHNOLOGY

222  $\text{W/M}^2$  POWER DENSITY  
>92% POWER IN YEAR 25  
-0.24%/°C TEMPERATURE  
COEFFICIENT OF  $P_{\text{MAX}}$




ELIGIBLE

# REC ALPHA® PURE 2 DATASHEET

## GENERAL DATA

Cell Type	132 half-cut REC bifacial heterojunction cells
Glass	3.2 mm solar glass with anti-reflective surface treatment in accordance with EN12150
Backsheet	Highly resistant polymer (Black)
Frame	Anodized aluminum (Black)
Junction Box	3-part, 3 bypass diodes, IP68 rated, in accordance with IEC 62790:2020
Connectors	Stäubli MC4 PV-KBT4/KST4 (4 mm <sup>2</sup> ) in accordance with IEC 62852:2014, IP68 only when connected
Cable	4 mm <sup>2</sup> solar cable, 1.20 m + 1.20 m in accordance with EN50618:2014
Dimensions	1865 x 1040 x 30 mm (1.94 m <sup>2</sup> )
Weight	21.7 kg
Origin	Made in Singapore

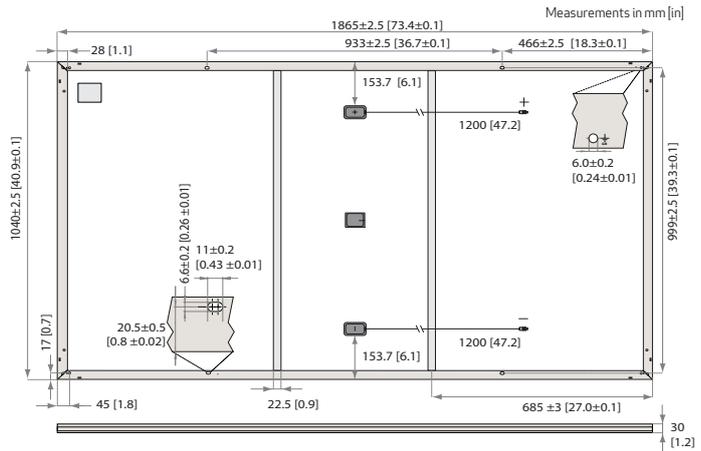

## ELECTRICAL DATA

PRODUCT CODE\*: RECxxxAA Pure 2

STC

Power Output - P <sub>MAX</sub> (W <sub>p</sub> )	400	410	420	430
Watt Class Sorting - (W)	0/+10	0/+10	0/+10	0/+10
Nominal Power Voltage - V <sub>MPP</sub> (V)	40.2	40.6	41.2	41.8
Nominal Power Current - I <sub>MPP</sub> (A)	9.96	10.10	10.20	10.29
Open Circuit Voltage - V <sub>OC</sub> (V)	48.5	48.8	49.1	49.3
Short Circuit Current - I <sub>SC</sub> (A)	10.72	10.77	10.83	10.88
Power Density (W/m <sup>2</sup> )	206	211	216	222
Panel Efficiency (%)	20.6	21.1	21.6	22.2

NMOT

Power Output - P <sub>max</sub> (W <sub>p</sub> )	305	312	320	327
Nominal Power Voltage - V <sub>MPP</sub> (V)	37.9	38.3	38.8	39.4
Nominal Power Current - I <sub>MPP</sub> (A)	8.04	8.16	8.24	8.31
Open Circuit Voltage - V <sub>OC</sub> (V)	45.7	46.0	46.3	46.5
Short Circuit Current - I <sub>SC</sub> (A)	8.66	8.70	8.75	8.79

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m<sup>2</sup>, temperature 25°C), based on a production spread with a tolerance of P<sub>MAX</sub>, V<sub>OC</sub> & I<sub>SC</sub> ±3% within one watt class. Nominal module operating temperature (NMOT: air mass AM1.5, irradiance 800 W/m<sup>2</sup>, temperature 20°C, windspeed 1 m/s). \*Where xxx indicates the nominal power class (P<sub>MAX</sub>) at STC above.

## TEMPERATURE COEFFICIENT \*

P<sub>MAX</sub> -0.24%/°C    V<sub>OC</sub> -0.24%/°C    I<sub>SC</sub> 0.04%/°C    \*The temperature coefficients stated are linear values

## MODULE RATINGS

Module Operating Temperature [T98]§	80°C
Min Environmental Temperature	-40°C
Nominal Module Operating Temperature	44 ± 2°C
Max Hail Rating	35 mm @ 27.2 m/s
System Voltage	1000 V
Max Series Fuse Rating	25 A
Max Reverse Current	25 A

§ 98th percentile operating temperature


## MAXIMUM TEST LOAD\*

Front (4-Point)*	+7000 Pa (714 Kg/m <sup>2</sup> )
Rear (4-Point)*	-4000 Pa (408 Kg/m <sup>2</sup> )
Front (6-Point)**	+8000 Pa (816 Kg/m <sup>2</sup> )
Rear (6-Point)**	-6000 Pa (612 Kg/m <sup>2</sup> )

Design load = Test load / 1.5 (safety factor)

\* IEC61730/UL61730 certified. Refer to installation manual.  
\*\* Internal testing. Refer to installation manual.

Available from:

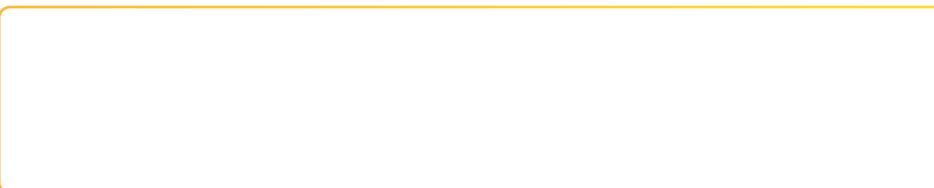

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

## CERTIFICATIONS

ISO 14001; ISO 9001; IEC 45001; IEC 62941	
IEC 61215:2021; IEC 61730:2023; UL 61730	
IEC 61730	Fire Type C (as per UL 790)
ISO 11925-2	Ignitability (EN 13501-1 Class E)
IEC 62716	Ammonia Resistance (Optional)
IEC 61701	Salt Mist - SM6 (Optional)
IEC 61215:2016	Hailstone (35 mm)
UL 61730	Fire Type 2
IEC TS 63126	Level 1



**takeaway**  
for an easy way  
Take-e-way  
WEEE-compliant  
scheme

## WARRANTY

	Standard	REC ProTrust	
	No	Yes	Yes
Installed by an REC	No	Yes	Yes
Certified Professional			
System Size	All	<25 kW	25-500 kW
Product Warranty (yrs)	20	25	25
Power Warranty (yrs)	25	25	25
Labor Warranty (yrs)	0	25	10
Power in Year 1	98%	98%	98%
Annual Degradation	0.25%	0.25%	0.25%
Power in Year 25	92%	92%	92%


REC ProTrust Warranty applies only for i) REC panels installed by an REC Certified Solar Professional, and ii) panels have been registered by the installer with REC. Subject to System Size and further conditions. See www.recgroup.com for details.

## DELIVERY INFORMATION

Panels per Pallet	33
Panels per 40 ft GP/high cube container	792 (24 Pallets)
Panels per 13.6 m truck	924 (28 Pallets)

## LOW LIGHT BEHAVIOUR

Typical low irradiance performance of module at STC:

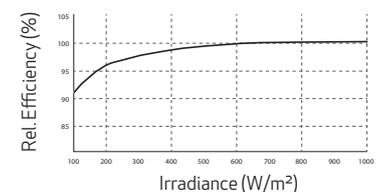

REC Solar PTE. LTD.  
20 Tuas South Ave. 14  
Singapore 637312  
post@recgroup.com  
www.recgroup.com