

REC TWINPEAK 2 PACKAGING INFORMATION


These packaging specifications are applicable to the following products:

REC TwinPeak 2 Series REC TwinPeak 2 BLK Series REC TwinPeak 2 Mono Series

PALLET FRONT VIEW (DOUBLE STACKED)



PANEL IDENTIFICATION

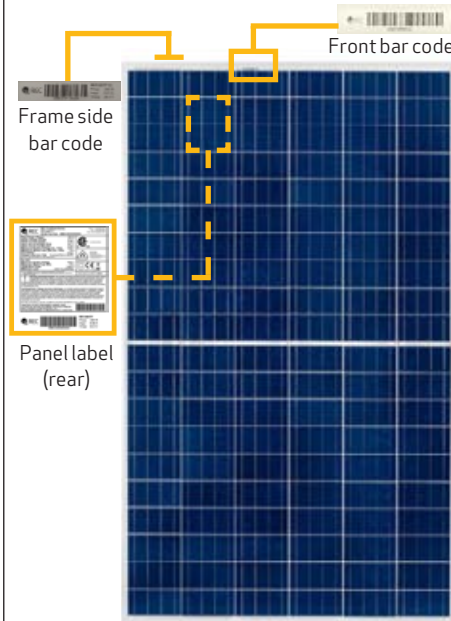

PALLET SHIPMENT DIMENSIONS

| | |
|---------------------------------|-----------------------|
| Length of pallet: | 1712 mm (68 in) |
| Width of pallet: | 1045 mm (41 in) |
| Height of single pallet stack: | 1210 mm (47.5 in) |
| Height of double pallet stack: | 2420 mm (95 in) |
| Pallet weight: | 40 kg (88 lbs) |
| Stack weight (pallet + panels): | ca. 520 kg (1150 lbs) |

DELIVERY INFORMATION

| | |
|--|---------------------|
| Panels per pallet: | 26 |
| Panels per GP/high cube container (40 ft): | 728 (28 pallets) |
| Panels per 13.6 m truck: | 780 (30 pallets) |
| Panels per 53 ft truck: | 884 (34 pallets) |


DELIVERY DOCUMENTATION

| | |
|---------------------|---------------|
| Flash data list: | On short side |
| Serial number list: | On short side |
| Product name: | On long side |
| Watt class: | On long side |

PALLET SIDE VIEW (DOUBLE STACKED)



PACKAGING DOCUMENTATION

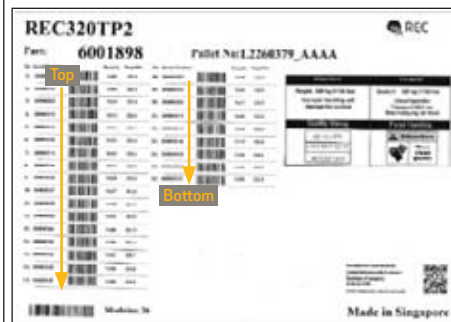

PACKAGING MATERIAL

| | |
|----------------------------|-------------------------------|
| Pallet: | Wood |
| Foam pad: | Polyurethane Polyether Polyol |
| Top cover: | Corrugated cardboard |
| Edge protectors: | Core board - Kraft |
| Corner pieces and spacers: | HDPE |

STORAGE AND TRANSPORTATION

| | |
|------------------------------|--|
| Stacking for storage: | 2 pallets max |
| Stacking for transportation: | 2 pallets max |
| Note: | When double stacking pallets, ensure upper pallet sits securely on edge protector. |
| Note: | Pallets delivered stacked are not bound together. |

PALLET STACKING



QUALITY

REC performs a quality check on all pallets before and during loading. Vehicles will only be loaded with REC panels if they are deemed safe and serviceable. During transportation, the pallets are stably loaded in protected containers with air bags between pallets to secure them in position. The freight company and driver are responsible for ensuring suitable load safety for each delivery vehicle. Vehicles without suitable load safety measures will not be loaded. REC makes every effort to ensure environmentally-friendly packaging materials are used.

MINIMUM FORK LENGTHS FOR TRANSPORTATION

| | | Single/Double stack only |
|-------------|------------|--|
| Forklift | Long side | 1.2 m (47 in) Loading & unloading of container only |
| | Short side | 1.5 m (59 in) |
| Pallet jack | Long side | X |
| | Short side | 1.5 m (59 in) |

Note: Forks must be spaced a minimum of 500 mm apart
Handlers must ensure that vehicles used for REC pallets can handle the specified load safely.

Note: Specifications subject to change without notice